

PHONE: (07) 5411 4209 (Option 2)
OR (02) 8004 3333 (Option 2)

WEBSITE: tbafirefly.com.au
EMAIL: sales@tbafirefly.com.au

MATERIAL DESCRIPTION

TBA Firefly™ NCBR is Fortaglas rope, over-braided with a continuous filament. TBA Firefly™ NCBR is Permeable.

CERTIFICATION

AS1530.1 Non-Combustibility
CSIRO Report No: FNC11220

DIMENSIONS

Available Per ROLL


Diameter	x	Length	-	Weight
12.5mm	x	100M	-	2.77KG
15mm	x	100M	-	3.4KG
25mm	x	80M	-	7.28KG
30mm	x	60M	-	7.2KG
40mm	x	50M	-	9.9KG
50mm	x	40M	-	10.35KG

APPLICATIONS


TBA Firefly™ NCBR (Non-Combustible Backing ROD) should be used in between panel joints and other joints where non-combustible (AS1530.1) backing rods are required.

TBA Firefly™ NCBR should be used where a foam backing rod would be typically used.

**TBA FIREFLY™ NON-COMBUSTIBLE
BACKING ROD**

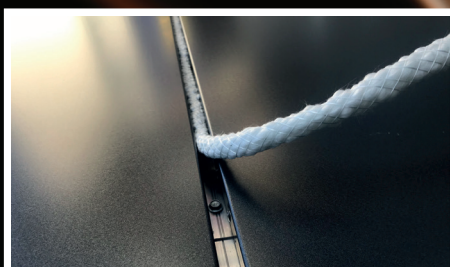

TBA Firefly™ Non-Combustible Backing Rod Being Installed Between A Panel Joint

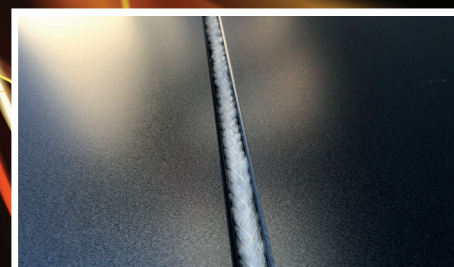

TBA Firefly™ Non-Combustible Backing Rod Before Being Covered With Silicone Sealant