

PHONE: (07) 5411 4209 (Option 2)
OR (02) 8004 3333 (Option 2)

WEBSITE: tbafirefly.com.au
EMAIL: sales@tbafirefly.com.au

MATERIAL DESCRIPTION

TBA FireflyTM Phoenix EA Sarking is a lightweight, waterproof sarking, foil faced on one side.

CERTIFICATION

Tested for both vertical and horizontal applications

AS1530.1 Non-Combustibility
CSIRO Report No: FNC11220

AS1530.4
BRANZ Report Number FAR2701 (Vertical Only)

AS1530.2-1993 Flammability Test
AWTA Report Number 7-576926-CN

AS4200.1-1994 Clause 6.1.3

AS1301.448s -1991
AS/NZS 4200.1-1994 Table 1 (Extra Heavy Duty)
Number: 7-577747-CN

AS/NZS4201.4-1994 (PASS)
AS/NZS4200.1-1994 CLAUSE 6-4 (High)
AWTA Report

Full compliance to AS3959-2009 Extra Heavy

DIMENSIONS

ROLL

25m x 1m = 25m²

1 mm Thick

560g per m²

FRL -/90/-


APPLICATIONS

Phoenix EA extra heavy duty sarking is used to wrap the outside of timber or steel roof and wall frames to provide superior protection against mild to severe ember attack during bush fires. In addition to its flammability index of 1 it has a Fire Rating Level of -/90/- when tested to AS1530.4 (Method for fire tests on building materials, components and structures).

**TBA FIREFLYTM PHOENIX EA
SARKING**



Sarking Under Eave Protection

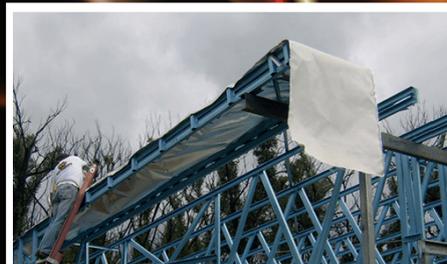

Starting Roof Wrap



Completed Sarking Installation