

PHONE: (02) 8004 3333

WEBSITE: tbafirefly.com.au
EMAIL: sales@tbafirefly.com.au

MATERIAL DESCRIPTION

TBA Firefly™ Titan Cavity Fire Barrier is a flexible and lightweight fabric with an inner core of insulating Fire Protection.
Acoustic Performance = 49dB room to room.

CERTIFICATION

AS1530.1 Non-Combustibility
CSIRO Report No: FNC11220

AS1530.3 Simultaneous Determination
of Ignitability, Flame Propagation,
Heat Release and Smoke Release
AWTA Report No: 20-002569

Tested and assessed in accordance with:
AS1530.4-2005 and AS4072.1-2005
Exova Warringtonfire Report No: 22766

DIMENSIONS

ROLL
6m x 1.3m = 7.8m²
15 mm Thick 3.9kg per m²

FRL 60/60/60
OR FRL - 120/60


APPLICATIONS

This easy to install flexible fire barrier is used as a DTS solution to provide a seal of up to 6.3m high x infinite length, which extends from the head of a compartment wall/sub division wall to the underside of the roof lining. Flexibility and fire rating level makes this product perfect for bespoke applications.

TBA FIREFLY™
TITAN



Strata Unit Subdivision NSW

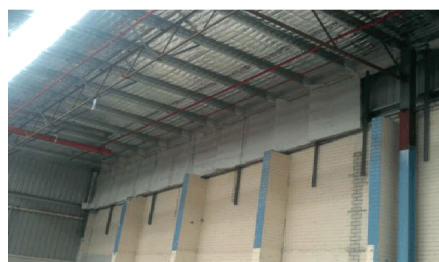

Titan Commercial Installation
Perth WA



Titan Vertical Seam