

TBA FIREFLYTM

PASSIVE FIRE PROTECTION

TBA Textiles Pty Ltd
ABN: 30 161 422 359
Issue Date: 09/05/2022

34

PHONE: (07) 5411 4209 (Option 2)
OR (02) 8004 3333 (Option 2)

WEBSITE: tbafirefly.com.au
EMAIL: sales@tbafirefly.com.au



TIMBER FRAME

CERTIFICATION

Tested in accordance with AS1530.4-2014
Warringtonfire Report No: 22766

FRL 30/30/30
TESTED FROM OUTSIDE IN

APPLICATIONS

Our Plus 60 fire blanket allows Lightweight Timber Framed buildings to be built in bushfire areas which have been designated as being in the highest Bushfire Attack Level of Flame Zone (BAL-FZ). Simply wrap the external timber framed wall with our lightweight Plus 60 fabric and over clad using a product deemed to be non-combustible under the BCA for example, FC Sheet or metal sheet to weather proof the building.

In accordance with AS3959-2018

9.1 In circumstances where the Vegetation is more than 10m away from the Building.

9.4 Walls

(c) A system with an FRL of -/30/30/30 or -/30/30 when tested from outside in.

May be used to meet BAL-FZ Compliance in lieu of AS1530.8.2


TBA FIREFLYTM PLUS 60 AS1530.4
BAL-FZ WALL SYSTEM



Installing the TBA FireflyTM Plus 60 to the timber frame



Easily Wrapped Around Architectural Features
Callignee 2 Victoria

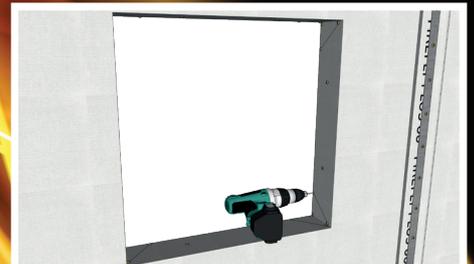

Window Reveal Fixing Detail